




# THINNER TDS

Europe

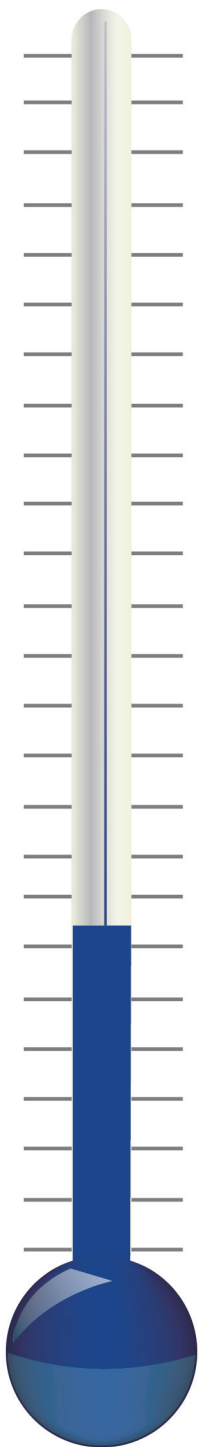

30°

25°

20°

15°

	PARTS	OPAQUE COLORS	BICOAT	CLEAR TOP COAT
		S11 S21	S11 S21	S21
		S21	S11 S21	S21
		S11	S19 S21	S21
		S11	S11	S11
		S19	S19	S19
		S11	S11	S11

**S19 / S50 THINNERS**

**HIGH PERFORMERS OF THE HYFLOW LINE**

ONE OF THE MAIN CHARACTERISTICS OF THE 4 THINNERS POSSIBILITY OF COVERING LARGE AREAS IN ALL CLIMATE CONDITIONS.

- USE S50 IN TEMPERATURE EXCEEDING 30 °C
- USE FAST THINNER S19 IN TEMPERATURE BELOW 15°C
- IN EXTREME COLD & WET WEATHER CONDITIONS, ACCELERATE FAST THINNER S19 WITH UP TO 10% OF ACCELERATOR S620 FOR FASTER DRYING. (USE ACCELERATED THINNER FOR 2K TOPCOATING MATERIAL ONLY)

**General Paint Co S.A.L.**

Lebanon, Beirut PO Box 7623 | Tel: +961 9 925990-1-2 | Fax: +961 9 925993 |